





Roller shutter door kits
with stainless steel mesh
from GKD

Transparency,
Aesthetics,
Functionality.



ferdinand
brasellmann.de
Diversity in profiles

Roller shutter door kits with stainless steel mesh from GKD

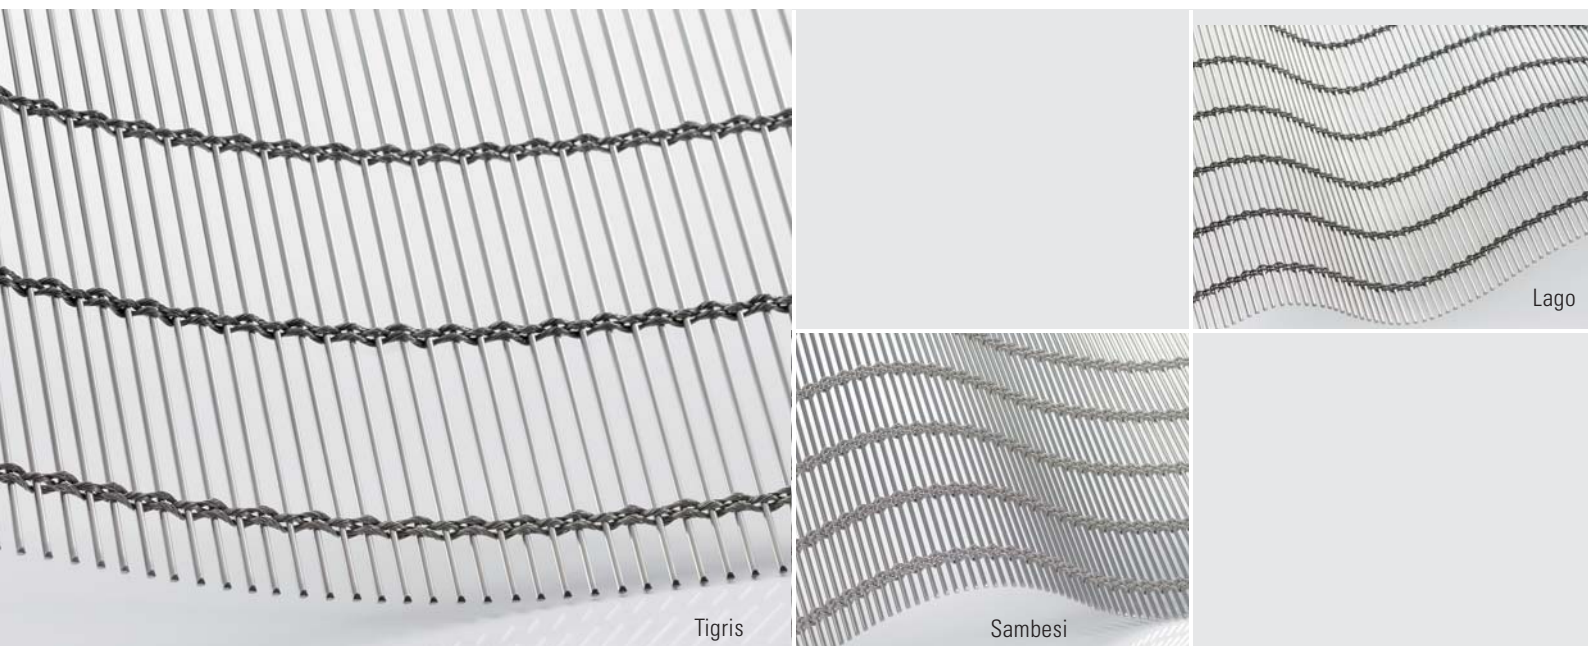

Stainless steel mesh from GKD can be used virtually maintenance-free for both indoor and outdoor applications and sets new standards with its sophisticated appearance and robust design.

An optimised lateral guide also guarantees easy and quiet opening and closing.

The combination of the well-known metal fabrics from GKD - Gebr. Kufferath AG with the proven construction of our roller shutter door kits opens up new possibilities for building closures where transparency, aesthetics, functionality and safety are all important.

Mesh	Lago	Sambesi	Tigris
Material	Stainless steel	Stainless steel	Stainless steel
Free area	44.00 %	42.00 %	65.00 %
Total mesh thickness	3.5 mm	7.0 mm	6.2 mm
Weight	6.8 kg / m ²	10.75 kg / m ²	6.2 kg / m ²
Maximum clear width	8000 mm	8000 mm	8000 mm
Maximum clear height	5000 mm	5000 mm	5000 mm
Solar factor	g _{total} 0.38, Fc 0.56	g _{total} 0.32, Fc 0.55	g _{total} 0.46, Fc 0.78

Scope of delivery:

- pre-assembled roller shutter with the mesh type of your choice
- completely mounted on tube
- 2 standard brackets
- 1 bearing
- stainless steel guide rail with PVC edge protection
- GfA direct mount drive with digital top switch (other drives on request)
- dead man's control with connection cable and CEE plug

The supply of all required parts from one source enables favorable solutions within the framework of a well thought-out system.

The roller shutter door kit is delivered pre-assembled.

All shipped roller shutter door systems comply with DIN EN 13241-1.